

Product Change Notification

3G Sunset – Impacts on 4G-LTE Devices European Union and United Kingdom Deployments

Custom Applications for Retired mPower™ Versions



Date: April 17, 2024

Product Change Notification (PCN) Number

PCN 04172024-001

Overview

In the European Union and United Kingdom, 4G-LTE devices may no longer attach to the cellular network after their 3G network is sunset. Configuration changes are required by the cellular module used in these devices to avoid a service disruption.

MultiTech provides custom applications, designed to make the software configuration changes needed, to help avoid service disruptions.

- Custom applications are for use with select versions of the mPower™ operating system used in Conduit® gateways.
 - mPower 6.3.0, mPower 6.3.1, mPower 6.3.2
 - mPower 6.0.0, mPower 6.0.1, mPower 6.0.2, mPower 6.0.4
 - mPower 5.3.8s-s1
- Custom applications are available on MultiTech DeviceHQ® and on the MultiTech website.

MultiTech has also released an updated version of the mPower operating system for use on Conduit Gateways.

- mPower 6.3.4 includes the same software configuration changes as the custom applications referenced in this PCN.
- Updating devices to mPower 6.3.4 is an alternative to using these custom applications.
- See [MultiTech PCN 04092024](#) for more information on mPower 6.3.4.

The cellular modem configuration changes are necessary on a limited set of Conduit gateways.

- See [model numbers impacted](#) for details.

For additional information on the impact of 3G sunset on 4G-LTE devices in the United Kingdom and European Union, visit <https://multitech.com/eu-gb-3g-sunset/>

Contents

[Overview](#)

[Custom Applications](#)

[Action Plan](#)

[Models Impacted](#)

[mPower Upgrade Process](#)

[Additional Information](#)

[Revision History](#)

Custom Application Overview

In the United Kingdom and European Union, 4G-LTE devices may no longer attach to the cellular network after their 3G network sunset. Custom applications include software configuration changes for the cellular module to help avoid service disruptions:

- Cellular default mode changed to LTE-only
- Cellular module default changed to CEMODE=2 (Data Centric)
- Voice call function is disabled
- SMS-only registration

DeviceHQ Custom Applications

Impacted devices can be updated using DeviceHQ. The DeviceHQ User Guide can be downloaded at:

https://multitech.com/wp-content/uploads/S000755_DeviceHQ_User_Guide.pdf

<p>DeviceHQ Login: https://www.devicehq.com/sign_in#/</p> <p>Custom Application Title: mP63x_UK-GB_3G_Sunset</p> <p>Version: 1.1.0</p> <p>Description: For use on gateway devices using an mPower 6.3.x version. This application makes software configuration changes to the cellular module to help avoid 4G-LTE service disruptions when network operators sunset their 3G networks.</p>	<div style="border: 1px solid #ccc; padding: 10px;"> <p>mP63x_UK-GB_3G_Sunset</p> <p>Version: 1.1.0</p> <p>Type: custom app</p> <p>☆☆☆☆☆ (0)</p> <p style="text-align: center; background-color: #f0f0f0; padding: 5px;">Add to My Apps</p> </div>
<p>DeviceHQ Login: https://www.devicehq.com/sign_in#/</p> <p>Custom Application Title: mP538_60x_UK-GB_3G_Sunset</p> <p>Version: 1.2.0</p> <p>Description: For use on gateway devices using mPower 5.3.8s-s1 or mPower 6.0.x versions. This application makes software configuration changes to the cellular module to help avoid 4G-LTE service disruptions when network operators sunset their 3G networks.</p>	<div style="border: 1px solid #ccc; padding: 10px;"> <p>mP538_60X_UK-GB_3G_Suns</p> <p>Version: 1.2.0</p> <p>Type: custom app</p> <p>☆☆☆☆☆ (0)</p> <p style="text-align: center; background-color: #f0f0f0; padding: 5px;">Add to My Apps</p> </div>

Downloadable Custom Applications

Custom applications are downloadable from the MultiTech website.

Link to Download: https://multitech.com/wp-content/uploads/mP63x_UK-GB_3G_Sunset.zip

Version: 1.1.0

Description:

For use on gateway devices using an **mPower 6.3.x version**. This application makes software configuration changes to the cellular module to help avoid 4G-LTE service disruptions when network operators sunset their 3G networks.

Link to Download: https://multitech.com/wp-content/uploads/mP538_60x_UK-GB_3G_Sunset.zip

Version: 1.2.0

Description:

For use on gateway devices using **mPower 5.3.8s-s1 or mPower 6.0.x versions**. This application makes software configuration changes to the cellular module to help avoid 4G-LTE service disruptions when network operators sunset their 3G networks.

Suggested Action Plan

Customers

1. Contact your wireless network operator and understand how their 3G network sunset plans impact your current and future gateway deployments.
2. Update devices using custom applications available on [DeviceHQ](#) or www.multitech.com.
3. Additional information
 - Technical inquiries: <https://support.multitech.com/support/login.html>
 - Sales inquiries: email sales@multitech.com

Distributors

1. Forward this announcement to others in your organization who are actively involved in the sale or support of programmable IoT gateways.
2. Notify existing customers that 3G network sunset plans in the European Union and United Kingdom may impact their 4G devices.
3. Notify customers that custom applications are available that configure the cellular module and help avoid service disruptions.

Models Impacted

The custom applications are only required for European Union, United Kingdom, and Global Gateway Models.


- MultiTech Conduit® Gateway: MTCDT-L4E1, MTCDT-L4G1-868 models
- MultiTech Conduit® IP67 Base Station: MTCDTIP-L4E1, MTCDTIP-L4G1-868 models
- MultiTech Conduit® IP67 200 Series Base Station: MTCDTIP2-L4E1 models
- MultiTech Conduit® AP Access Point: MTCAP-L4E1, MTCAP2-L4E1 models

mPower Operating System Upgrade Process


To install one of the custom applications, the mPower operating system running on the gateway must be one of the [versions listed above](#).

Gateways using a different mPower version should be upgraded as follows:

Upgrading Conduit Gateway to mPower 6.0.x or 6.3.x Versions

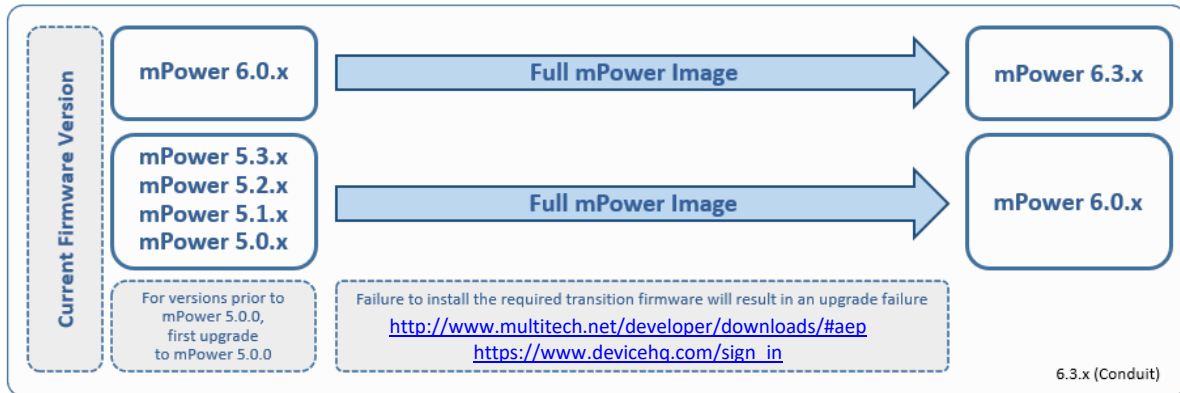

Upgrading Conduit Gateway to mPower 5.3.8s-s1

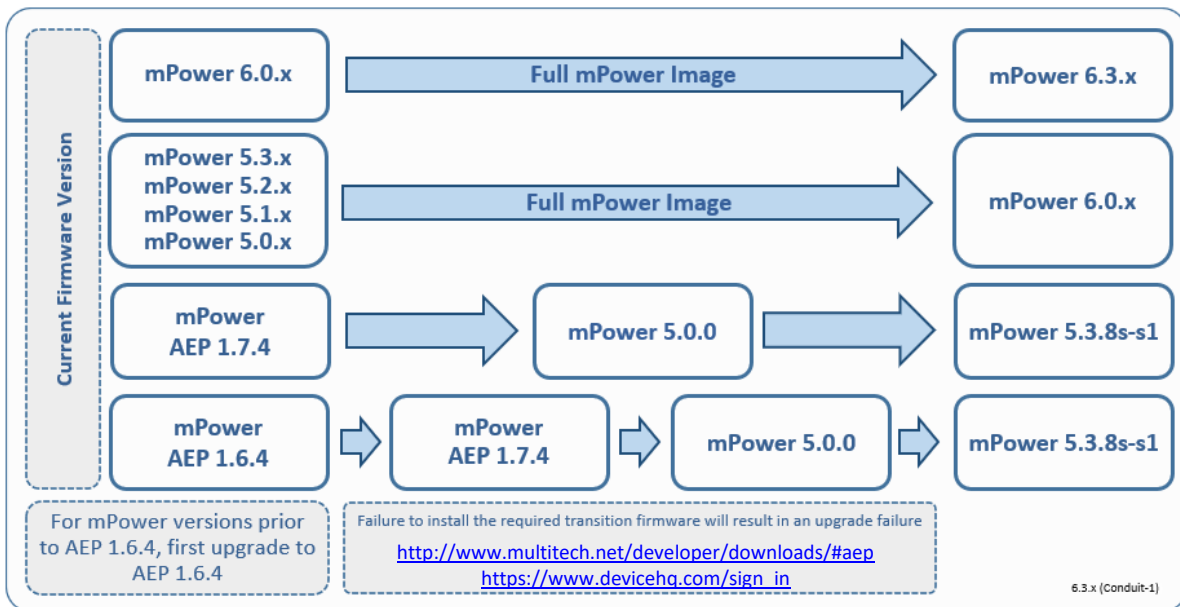

mPower Operating System Upgrade Process (continued)

Using an old configuration file on new Conduit devices may result in the new devices becoming non-functional. To successfully update Conduit devices, create separate configuration templates for each type of Conduit device:

- Hardware model (MTCDDT, MTCDDTIP)
- Hardware version (MTCDDT-0.1, MTCDDT-0.2, MTCDDTIP-0.0, MTCDDTIP-0.1)
- Cellular radio (-L4G1, -L4E1)
- mPower version (mPower 5.3.7, mPower 5.3.8s-s1, mPower 6.0.4)

When upgrading a device fleet:

1. Upgrade the mPower version on one device
2. Modify the user-specific configuration settings
3. Perform in-house testing and adjust settings if necessary
4. Use the newly developed configuration file as part of field updates when the new version of mPower is widely deployed

mPower Edge Intelligence Overview

mPower™ Edge Intelligence is MultiTech's embedded software offering delivering programmability, network flexibility, enhanced security, and manageability for scalable Industrial Internet of Things (IIoT) solutions. mPower Edge Intelligence simplifies integration with a variety of popular upstream IoT platforms to streamline edge-to-cloud data management and analytics, while also providing the programmability and processing capability to execute critical tasks at the edge of the network to reduce latency, control network and cloud services costs, and ensure core functionality – even in instances when network connectivity may not be available.

DeviceHQ Overview

MultiTech DeviceHQ® is a cloud-based tool set for managing the latest generation of MultiTech devices. It incorporates all the functionality of MultiTech Device Manager, on which so many M2M and IoT applications already rely for remote monitoring, upgrades and configuration of entire device populations – whether one or 1 million. DeviceHQ takes remote device management and maintenance to a new level, by providing an application marketplace, allowing users to browse applications or build their own then easily deploy them to and customize them for remote devices from anywhere.

Additional Information

For customers who have implemented the changes posted in this PCN and continue to experience 4G-LTE service interruptions, MultiTech suggests contacting your wireless network operator account representative with the following questions:

- Is my cellular service still active?
- Are my SIM cards LTE enabled?
- Is my device IMEI linked to a 3G account?

World Headquarters – USA

+1 (763) 785-3500 | sales@multitech.com

EMEA – UK

+(44) 118 959 7774 | sales@multitech.co.uk

DeviceHQ

<https://multitech.com/all-products/software-management/devicehq/>

Cloud-Based application store and IOT device management

mPower Software Downloads

<http://www.multitech.net/developer/downloads/>

MultiTech Developer Resources

<https://www.multitech.net/>

An open environment where you can ask development related questions and hear back from MultiTech engineering or a member of this community.

MultiTech Support Portal

<https://support.multitech.com/support/login.html>

Create an account and submit a support case directly to our technical support team.

MultiTech Website

<https://www.multitech.com>

Trademarks and Registered Trademarks

DeviceHQ, Conduit, mPower, MultiTech and the MultiTech logo are registered trademarks of Multi-Tech Systems, Inc. All other trademarks or registered trademarks are the property of their respective owners.

Copyright © 2024 by Multi-Tech Systems, Inc. All rights reserved

Revision History

Version	Author	Date	Change Description
-001	DT	04/17/2024	Original version